



Dependable safety valve to retain a set supply air pressure and guarantee a steady process control when a supply air is suddenly failed by accident and its pressure becomes lower than a set pressure

Specifications

	LU	
	LUS	LUD
Proof Pressure	Max 10 bar (150psi)	
Signal Pressure	1.4 ~ 7 bar	
Line Pressure	Max 7 bar (105psi)	
Flow Capacity (Cv)	0.9	
Operating Temperature	-20°C ~ +70°C	
Pneumatic Connections	PT(Rc) 1/4 or NPT 1/4	
Hysteresis	Within 0.1 bar	
Body Material	Aluminum die-cast / 316SS	
Weight	0.6 kg	0.8 kg


How to Order

LU	Acting Type	Pneumatic Connections	Operating Temp.	Body Material
-----------	-------------	-----------------------	-----------------	---------------

Description	Code
Acting Type :	S : Single acting D : Double acting
Pneumatic Connections :	1 : PT (Rc) 1/4 2 : NPT 1/4
Operating Temperature :	1 : -20 ~ +70°C (standard) 2 : -20 ~ +120°C (high temp.) 3 : -40 ~ +70°C (low temp.)
Body Material :	1 : Aluminum die-cast 2 : Stainless steel 316

Dimensions

< LUS >

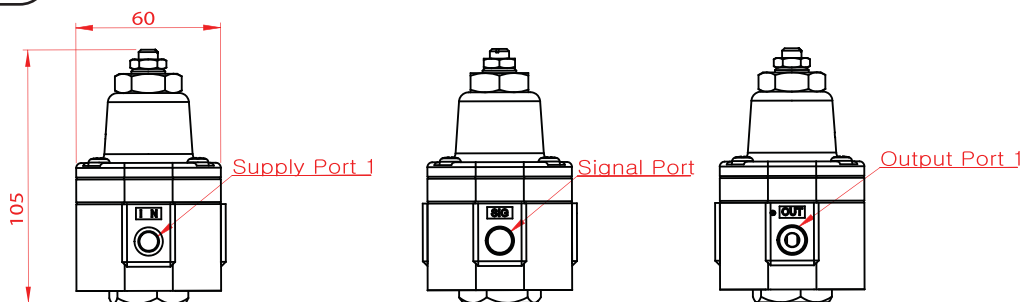

< LUD >

